




# Mini-Turbo Hybrid – MTH-43 Owner's Manual

**PSI RATING: 500–2500 PSI**  
**Up to 230 Degrees**  
**1 YEAR LIMITED WARRANTY**



### SWIVEL REPLACEMENT

1. Remove Left and Right housing - 8 screws
  2. Remove spray bar 3/4 nub
  3. Place 45 degree elbow in vice
  4. Loosen swivel nut all the way to top thread
  5. Remove bottom swivel nut, remove inner deck
  6. Use 22mm wrench to remove swivel.
- DO NOT OVERTIGHTEN THE 8 HOUSING SCREWS!**

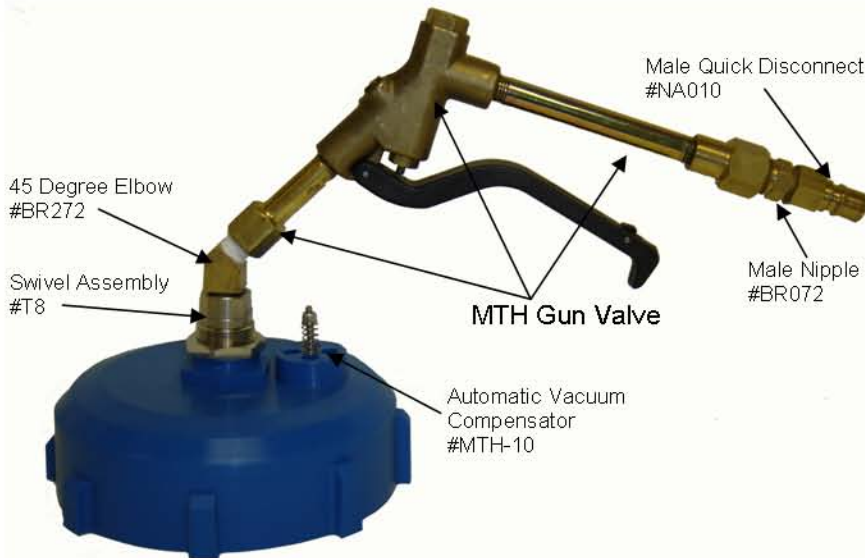

**Turbo Force International, Inc.**  
*7333 West Carole Lane*  
*Glendale, AZ. 85303*  
[www.turbo-force.com](http://www.turbo-force.com)